

# PAX A35 – How to set up and process payment

Page 1: Introduction

Page 2: Connect Cables

Page 3: Turn on terminal

Page 4: Locate IP Address

Page 5: Connect terminal with POS

Page 6: Process payment.

Congratulations on receiving your PAX Technology payment terminal. We do hope you enjoy it!

The box you have just opened should contain the following items:


1. Communication Cable
2. USB Type-C power cord
3. AC Power Adapter
4. A35 POS Terminal



1. LAN cable to red land port (Wired network using the Ethernet connector)




2. Insert the power cord's USB Type-C plug in the open port on the multi-function cable's junction adapter.

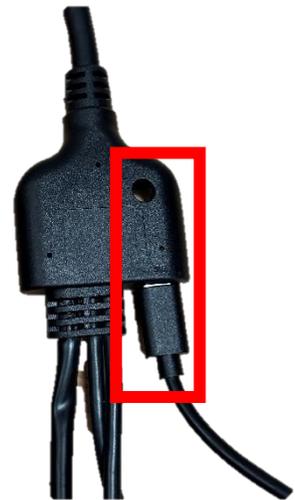

From the back of the terminal, locate the USB Type-C plug between the slots for the MicroSD and SAM cards.

3. Insert the multi-function cable's USB Type-C connector into the terminal's corresponding plug

4. Connect the cable's USB plug into the AC adapter's USB port and Plug the adapter into an AC outlet.

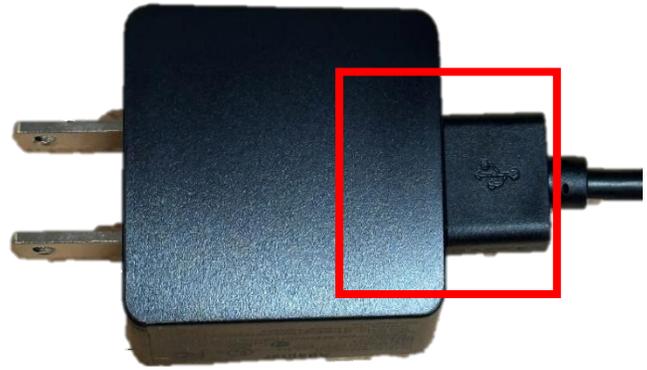

5. Get terminal IP Address:




Now, the terminal powers on automatically and makes a sound to indicate it is starting.

▷ To check terminal IP Address:



- Go to Settings

- Enter Password (if required)  
pax9876@@@  
or 9876

- Go to Network & Internet

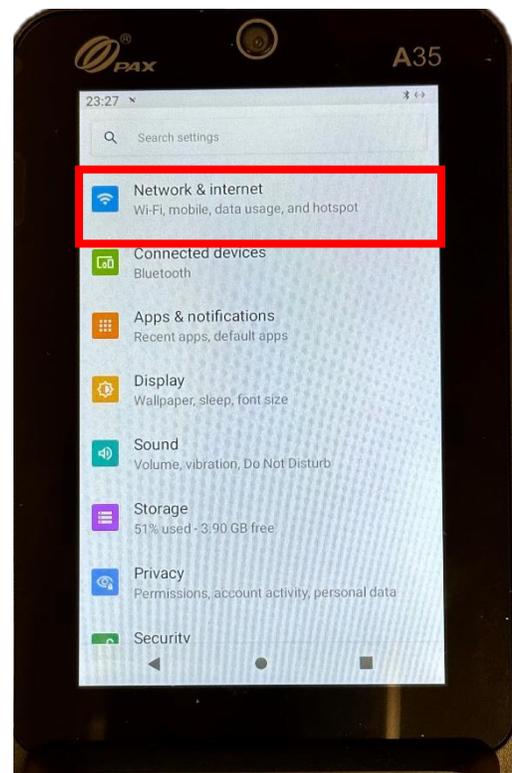


- Select "Ethernet"  
(Make sure Ethernet is on)

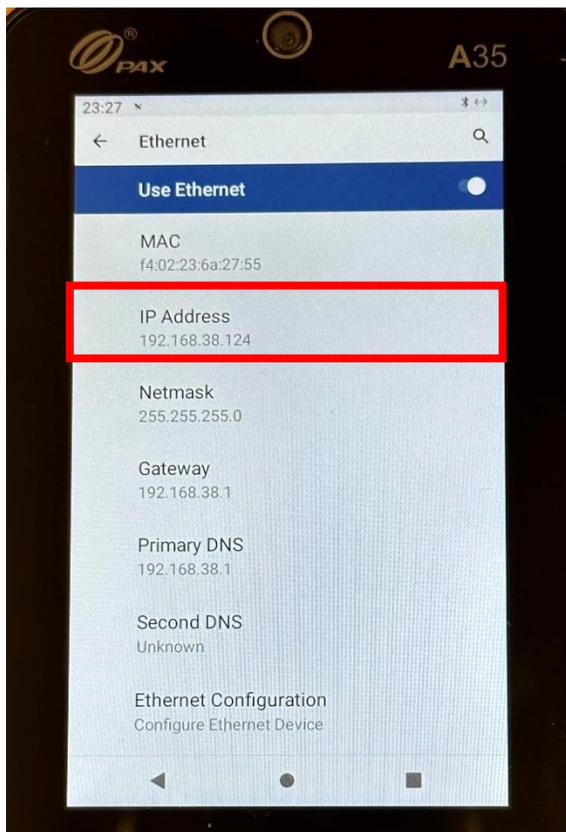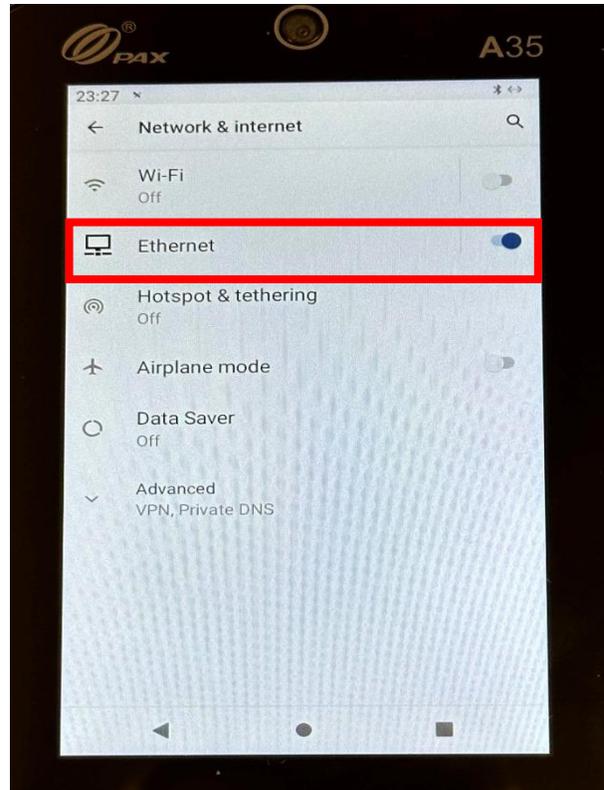

- IP Address will show up

## 6. Update Terminal IP Address in PUREJOIN POS.

- On the iPad go to the PUREJOINPOS app
- Log in with your PIN
- Go to Menu (top left) → Settings → (scroll down) Find Terminal IP Address
- **Match the Terminal IP Address** with what shows on the terminal
- Update **Port 10009**
- Save. Please logout and log back in at all registers.

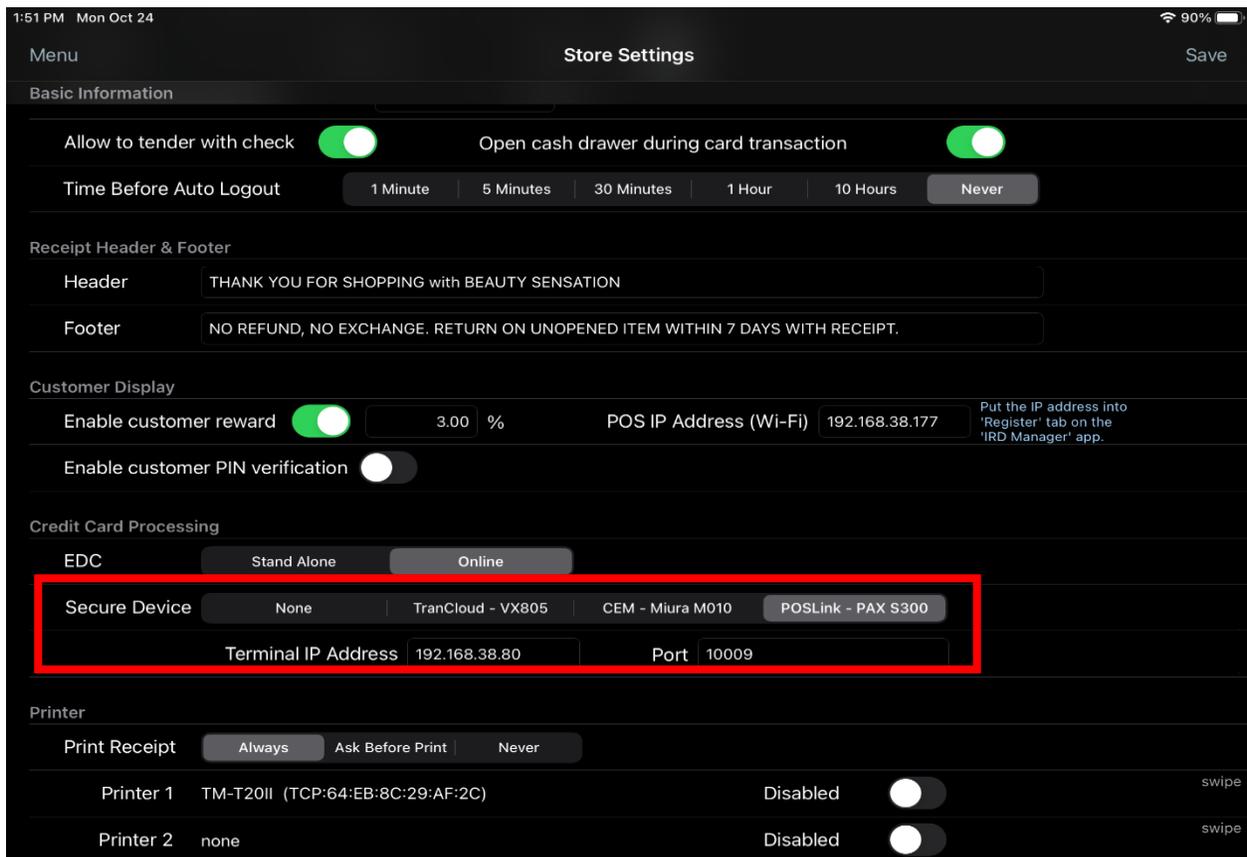

Now the terminal and POS are connected.

We will use **TSYS Sierra** as our main app for payment.

- On the terminal, go to HOME screen → go to TSYS Sierra app.
- Ring up a transaction on the POS → Pay → Credit/ Debit

Please make a test transaction before process payment with customer.

Customer can insert the chip/ swipe/ tap/ Apple Pay/ Google Pay with PAX A35.

If you have any question, call 678-206-0500 to get assistance.

